

MG

ROAD CONSTRUCTION MACHINERY
CAMS GROUP



WORLD'S MOST COMPACT PAVERS

ROOTS IN THE TRADITION, LOOKING TO THE FUTURE

In the heart of the Italian motor valley, where innovation has been flourishing for generations, Malvasi G has forged a history of excellence in the compact pavers industry. Every machine we produce is born here, in Sorbara, the province of Modena, an area renowned for its innovative spirit and engineering skills.

"Genius is only the result of an idea realized with determination and passion".

Giorgio Malvasi



AN INNOVATION AND SUCCESS STORY

THE RESULTS THAT SET US APART

With numbers on our side, we demonstrate our commitment and global leadership in the compact pavers industry:




**60 YEARS OF
EXPERIENCE**

Over six decades of passion and progress in the road paving industry.



**OVER
45 COUNTRIES
SERVED**

Our machines are appreciated all over the world



**MORE
400 THAN
PAVERS SOLD**

Synonymous with reliability and superior performance.



**OVER
10.000 ROAD
PROJECTS**

We have helped to make roads safer and more efficient.



**20 INTERNATIONAL
PATENTS
FILED**

Our technologies are protected and recognized for their uniqueness and innovation.

A JOURNEY THROUGH 60 YEARS OF EXCELLENCE

From Giorgio Malavasi to today: a legacy of innovation

A man and his vision: Giorgio Malavasi, an entrepreneur from the Emilia-Romagna region who founded the company with the aim of creating machines that could operate in limited spaces without sacrificing performance and quality. From this idea came the compact pavers, which have been able to conquer the market thanks to their efficiency and innovation.

Over the years, we have refined our ideas thanks to a constant dialogue with our customers, coming to create technologies such as **hydraulic extensions** and our flagship, the **mini paving machines Pavijet**, considered the most compact in the world with outstanding performance even on the toughest construction sites.

With over **20 international patents**, Malavasi G is today a symbol of cutting-edge technology, offering innovations that not only improve operational efficiency but also reduce costs and working time for companies specialized in paving.

In 2024, with the entry into **CAMS Group**, world leader in the production of crushing plants, screening and recycling of aggregates, Malavasi G joined a global network of skills and resources, ready to offer even more value to customers. This partnership will allow us to develop cutting-edge solutions and expand our presence in new international markets.



TECHNOLOGIES DESIGNED FOR EVERY ASPHALT PAVING NEED

Discover our paving machines: innovation, compactness and performance

Malavasi G offers a complete range of compact road paving machines, designed to meet every need. Each model is designed to be efficient, precise and easy to use, enabling companies to achieve excellent results in a short time



PAVERS MG7, MG7 SUPER AND TAPPABUCHI+

The MG7 pavers offer an innovative solution for the paving of medium-sized areas. The MG7 Super takes this performance to the next level, ensuring speed and efficiency in every project.



PAVER PAVIJET MG7-E SUPER

The Pavijet MG7 Super-e is a 100% electric paver designed to revolutionize paving operations for medium-sized areas, delivering maximum efficiency, high performance, and zero emissions.



MINI PAVER PAVIJET MG6

Narrow roads and intersections are no longer a problem with the Pavijet MG6 mini paver. This compact machine is ideal for working in small spaces while maintaining outstanding performance and ensuring a high-quality end result.



SPRAYCAT

The Spraycat is the perfect bitumen emulsion sprayer to be mounted on skid loaders, which meets the specific needs of our customers, making work even easier and faster.

PAVER MG7


INNOVATION IN
MEDIUM-SIZED
PAVING

1,4 m³

60 l/min

18 m/min

180 bar



PAVER MG7

It is a compact machine that brings innovation in the field of paving.

Pavijet MG7 is ideal for paving works such as:

- **CYCLE PATHS**
- **SIDEWALKS**
- **PARKING LOTS**
- **YARDS**
- **TRENCHES**
- **ROAD REPAIRS**
- **ROAD EXTENSIONS**

The width of the machine, its ease of use and versatility in many jobs make the Pavijet MG7 an innovative technology in its field.

EASE OF TRANSPORT

- Pavijet MG7 is a hydraulic paving machine compatible with any skid loader of at least 20 hp.
- The coupling is mechanical and the hydraulic connection via quick-release couplings.
- With the same skid loader the operator can load and unload the machine from the truck.
- The small size makes the Pavijet MG7 a machine that is easy to transport and use.

FUNCTIONS

- All functions are hydraulic (auger, screed lift/lower, screed extension/retraction, hopper opening/closing).
- The retractable hydraulic screed allows you to overcome obstacles.
- Maneuverability both from the machine board with the push-button panel and from outside with the radio control.

BENEFITS

- The width of the laying varies from 20 to 190 cm.
- Compact size.
- High speed of paving.
- Overcoming obstacles with retractable screed.
- Handles different types of materials: asphalt, concrete, sand, inert.
- Radio control.
- Full hydraulic.

TRANSPORT

Machine closed for transport



SEMI-OPEN

Semi-open machine



OPEN

Machine open ready for working



OPEN

Direct unloading of material from the truck



Direct unloading of material from the truck





Screed: adjustable, vibrating and heated




Longitudinal drive for thickness adjustment



DIMENSIONS

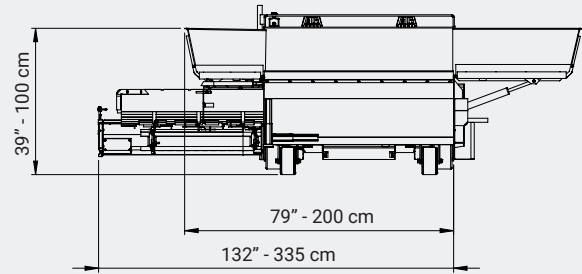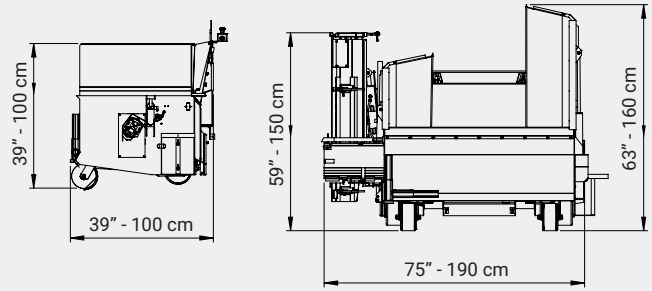

Closed screed

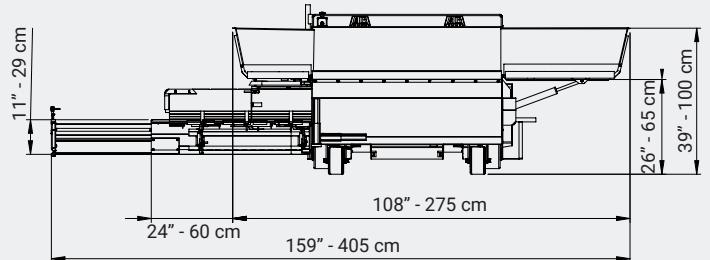

Open screed

TECHNICAL SPECIFICATIONS

Paving width from 8" - 20 cm to 75" - 190 cm

Paving height from 2" - 5 cm to 10" - 25 cm

Hopper capacity 1,4 m³

Oil flow rate 60 l/min

Paving speed up to 18 m/min

Hydraulic pressure 180 bar

Weight 770 kg

Vibration (optional) 60 Hz

Direction forward material paving

cold or hot (LPG powered) **Hot paving temperature**

140° C

Feed from front unloading truck **Control**

on-board push buttons or remote control **Components movement**

hydraulic

Washing with manual pump

Paint anti-corrosion

Colours available on request

Certification CE standard


PAVER MG7 SUPER ∇ 2m³

 60l/min

 18m/min

 180bar

INNOVATION IN
MEDIUM-SIZED
PAVING



PAVER MG7 SUPER

It is a compact machine that brings innovation in the field of paving.

Pavijet MG7 super is ideal for paving works such as:

- **CYCLE PATHS**
- **SIDEWALKS**
- **PARKING LOTS**
- **YARDS**
- **TRENCHES**
- **ROAD REPAIRS**
- **ROAD EXTENSIONS**

The width of the machine, its ease of use and versatility in many jobs make Pavijet MG7 super an innovative technology in its industry.

EASE OF TRANSPORT

- Pavijet MG7 super is a hydraulic paving machine compatible with any skid loader of at least 20 hp.
- The coupling is mechanical and the hydraulic connection via quick-release couplings.
- With the same skid loader the operator can load and unload the machine from the truck.
- The small size makes Pavijet MG7 super a machine that is easy to transport and use.

FUNCTIONS

- All functions are hydraulic (auger, screed lift/lower, screed extension/retraction, hopper opening/closing).
- The retractable hydraulic screed allows you to overcome obstacles.
- Maneuverability both from the machine board with the push-button panel and from outside with the radio control.

BENEFITS

- The width of the laying varies from 30 to 200 cm.
- Compact size.
- High speed of paving.
- Overcoming obstacles with retractable screed.
- Handles different types of materials: asphalt, concrete, sand, inert.
- Radio control.
- Full hydraulic.

TRANSPORT

Machine closed for transport



SEMI-OPEN

Semi-open machine




OPEN

Machine open ready for working



OPEN

Direct unloading of material from the truck



Direct unloading of material from the truck






Screed: adjustable, vibrating and heated



Longitudinal drive for thickness adjustment

DIMENSIONS

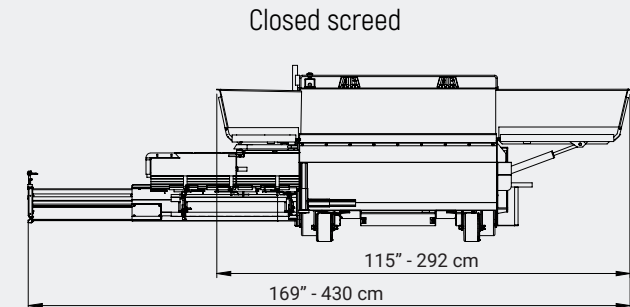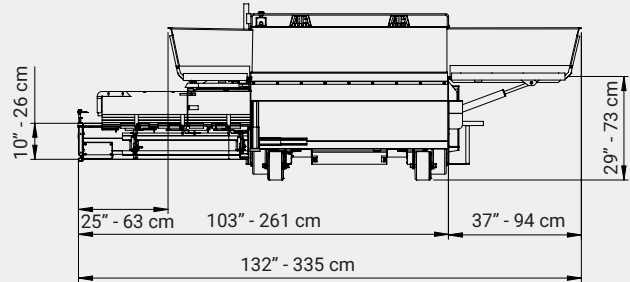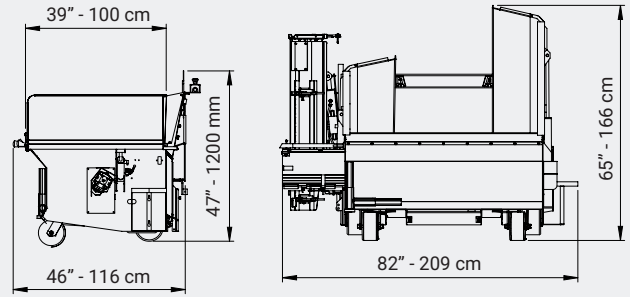

Closed screed

Open screed

TECHNICAL SPECIFICATIONS

Paving width	from 12" - 30 cm to 79" - 200 cm
Paving height	from 2" - 5 cm to 10" - 25 cm
Hopper capacity	2 m ³
Oil flow rate	60 l/min
Paving speed	up to 18 m/min
Hydraulic pressure	180 bar
Weight	830 kg
Vibration (optional)	60 Hz
Direction	forward
material paving	cold or hot (LPG powered)
Hot paving temperature	140° C
Feed	from front unloading truck
Control	on-board push buttons or remote control
Components movement	hydraulic
Washing	with manual pump
Paint	anti-corrosion
Colours	available on request
Certification	CE standard

PAVER TAPPABUCHI+


IT INTEGRATES
WITH THE PAVIJET
MG7 SUPER AND IS
COMPATIBLE WITH
ANY SKID LOADER

2m³

60l/min

18m/min

180bar



PAVER TAPPABUCHI+

It is an upgrade integrated in Pavijet MG7 Super which consists of a tank for bituminous emulsion complete with spray lance.

The Tappabuchi+ Finitrice is ideal for paving works such as:

- **CYCLE PATHS**
- **SIDEWALKS**
- **PARKING LOTS**
- **YARDS**
- **TRENCHES**
- **ROAD REPAIRS**
- **ROAD EXTENSIONS**

The width of the machine, its ease of use and versatility in many jobs make Tappabuchi+ an innovative technology in its industry.

EASE OF TRANSPORT

- Tappabuchi+ is a hydraulic paving machine compatible with any skid loader of at least 20 hp.
- The coupling is mechanical and the hydraulic connection via quick-release couplings.
- With the same skid loader the operator can load and unload the machine from the truck.
- The small size makes Tappabuchi+ a machine that is easy to transport and use.

FUNCTIONS

- All functions are hydraulic (auger, lift lowering screed, extension/retraction screed, opening/closing hopper).
- The reach of the hand spear is 5 m.
- Tank capacity 180 L.
- Maneuverability both from the machine and from the radio control.

BENEFITS

- The width of the laying varies from 30 to 200 cm.
- Compact size.
- High speed of paving.
- Overcoming obstacles with retractable screed.
- Handles different types of materials: asphalt, concrete, sand, inert.
- Radio control.
- Full hydraulic.

TRANSPORT

Machine closed for transport



SEMI-OPEN

Semi-open machine




OPEN

Machine open ready for working



OPEN
Direct unloading of material from the truck



Direct unloading of material from the truck





N.4 material outputs from the screed


Longitudinal drive for thickness adjustment



DIMENSIONS

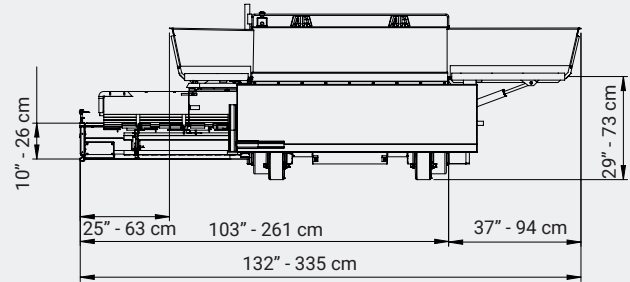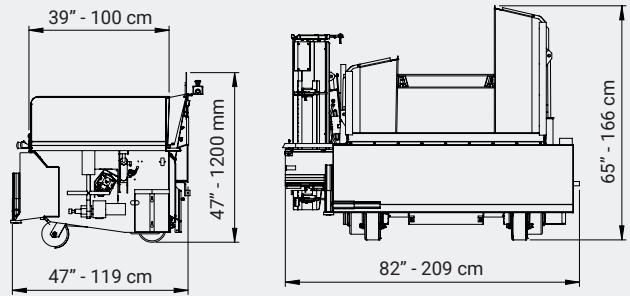

Closed screed

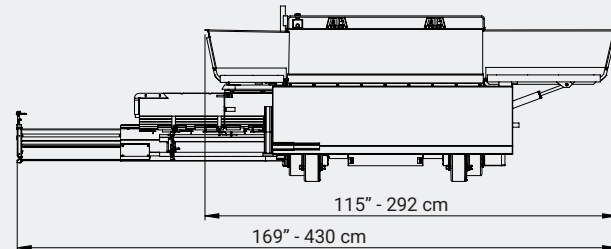

Open screed

TECHNICAL SPECIFICATIONS

Paving width	from 12" - 30 cm to 79" - 200 cm
Paving height	from 2"-5 cm to 10" - 25 cm
Hopper capacity	2 m ³
Oil flow rate	60 l/min
Paving speed	up to 18 m/min
Hydraulic pressure	180 bar
Weight	940 kg
Vibration (optional)	60 Hz
Direction	forward
Material	paving Cold or hot (LPG powered)
Hot paving temperature	140° C
Feed	from front unloading truck
Control	on-board push buttons or remote control
Components movement	hydraulic
Washing	with manual pump
Paint	anti-corrosion
Colours	available on request
Certification	CE standard

PAVER PAVIJET MG7-E SUPER



INNOVATION IN
MEDIUM-SIZED
PAVING

2m³

60l/min

18m/min

180bar

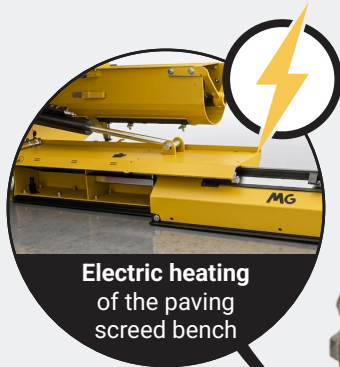

PAVER MG7 SUPER

It is a compact machine that brings innovation in the field of paving.

Pavijet MG7 super is ideal for paving works such as:

- **CYCLE PATHS**
- **SIDEWALKS**
- **PARKING LOTS**
- **YARDS**
- **TRENCHES**
- **ROAD REPAIRS**
- **ROAD EXTENSIONS**

The width of the machine, its ease of use and versatility in many jobs make Pavijet MG7 super an innovative technology in its industry.

EASE OF TRANSPORT

- Pavijet MG7 super is a hydraulic paving machine compatible with any skid loader of at least 20 hp.
- The coupling is mechanical and the hydraulic connection via quick-release couplings.
- With the same skid loader the operator can load and unload the machine from the truck.
- The small size makes Pavijet MG7 super a machine that is easy to transport and use.

FUNCTIONS

- All functions are hydraulic (auger, screed lift/lower, screed extension/retraction, hopper opening/closing).
- The retractable hydraulic screed allows you to overcome obstacles.
- Maneuverability both from the machine board with the push-button panel and from outside with the radio control.

BENEFITS

- The width of the laying varies from 30 to 200 cm.
- Electric heating of the paving screed bench
- Compact size.
- High speed of paving.
- Overcoming obstacles with retractable screed.
- Handles different types of materials: asphalt, concrete, sand, inert.
- Radio control.
- Full hydraulic.

TRANSPORT

Machine closed for transport



SEMI-OPEN

Semi-open machine




OPEN

Machine open ready for working




OPEN

Direct unloading of material from the truck



Direct unloading of material from the truck


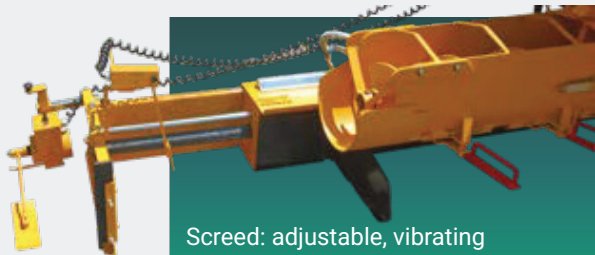


Screed: adjustable, vibrating and heated




Longitudinal drive for thickness adjustment

DIMENSIONS

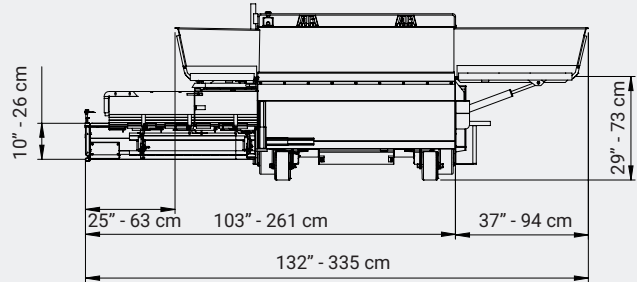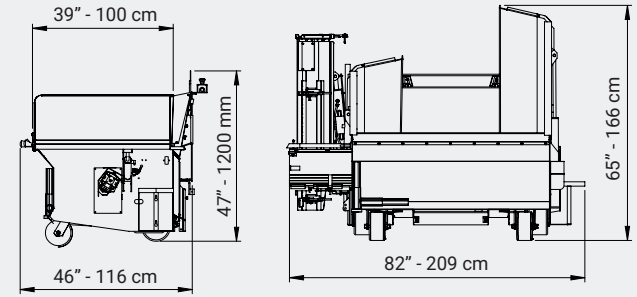

Closed screed

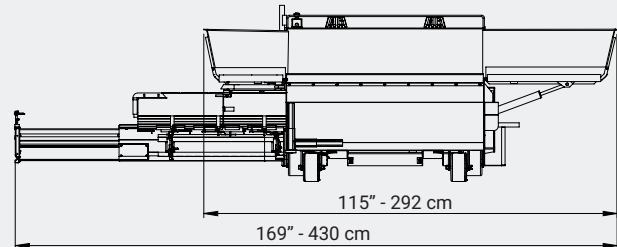

Open screed

TECHNICAL SPECIFICATIONS

Paving width	from 12" - 30 cm to 79" - 200 cm
Paving height	from 2" - 5 cm to 10" - 25 cm
Hopper capacity	2 m ³
Oil flow rate	60 l/min
Paving speed	up to 18 m/min
Hydraulic pressure	180 bar
Weight	830 kg
Vibration (optional)	60 Hz
Direction	forward
material paving	cold or hot (LPG powered)
Hot paving temperature	140° C
Feed	from front unloading truck
Control	on-board push buttons or remote control
Components movement	hydraulic
Washing	with manual pump
Paint	anti-corrosion
Colours	available on request
Certification	CE standard

MINI PAVER PAVIJET MG6



60 l/min


25 m/min

180 bar


Pavijet MG6 is a compact machine that brings innovation in the road paving industry.

Pavijet MG6 is compatible with any skid loader and mini excavator of at least 20 hp power. Pavijet MG6 is ideal for paving cycle paths, sidewalks, parking lots, trenches and road repairs.

Pavijet MG6 can pave hot and cold asphalt, concrete, sand and aggregates. Pavijet MG6 is fully hydraulic and is operated directly by the operator by the skid loader driver.



DIMENSIONS

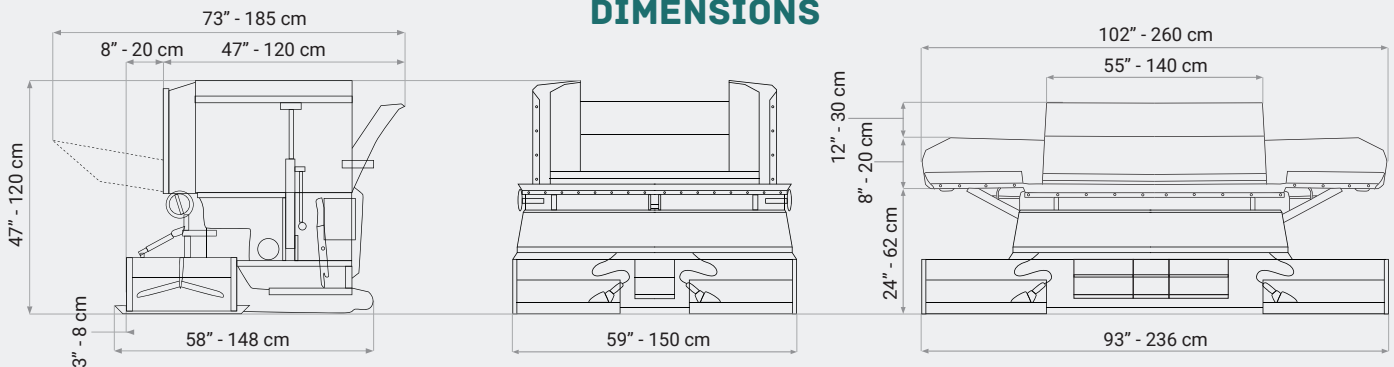

TECHNICAL SPECIFICATIONS

Paving Width from 16" - 40 cm to 91" - 230 cm

Paving height from 2" - 5 cm to

Hopper capacity 1,2 m³

Oil flow rate 60 l/min

Paving speed up to 25 m/min

Hydraulic pressure 180 bar

Weight 445 kg

Vibration (optional) 60 Hz

Material paving cold or hot (with LPG heating)

Hot paving temperature 140° C

Feeding front and side

Control hydraulic controls from the machine

Components movement hydraulic

Washing with manual pump

Paint available on request

Colours available on request

Certification CE standard



SPRAYCAT


BITUMINOUS EMULSION SPRAYER ON SKID LOADER

Spraycat is fully hydraulic and compatible with any skid loader.

Spraycat is applicable to the loader bucket or mechanical attachment and is operated by the driver of the machine to which it is applied.

EQUIPMENT

- N. 2 pipes for connection to the quick couplings of the hydraulic system for starting up the hydraulic pump and all operating organs.
- N. 1 spray bar with a minimum range of 0.50 m and a maximum of mt. 2.00 m, with lateral sliding system.
- N. 1 manual lance with an operating range of 5 m, to reach the corners and parts not accessible with the skid loader.
- N. 1 holder for emulsion tank
- N. 1 container for washing at the end of work
- Anti-corrosion paint
- Certification of CE standard
- Dimensions: 1.20 m x 0.80 m x 0.55 m
- Unladen weight: 120 kg

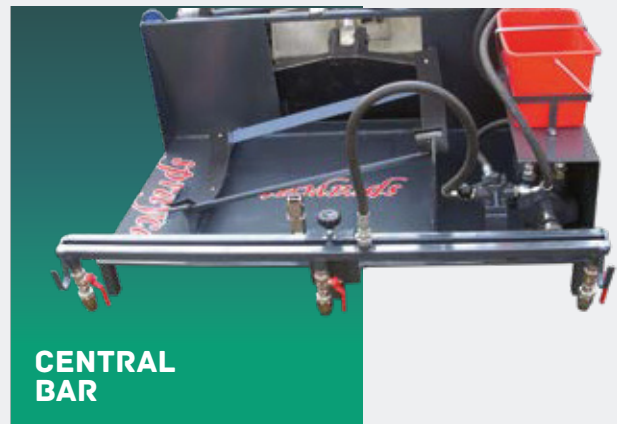



MALAVASI G. SRL Via
Nazionale, 28 41030
Sorbara, MO (Italy)



+ 39 059 902113



sales@malavasig.com



malavasig.com